


Bellows vacuum cups, 2.5 bellows, made of Thermalon® – Series SKT-B2

MINIMUM MARKING /
UP TO 160°C

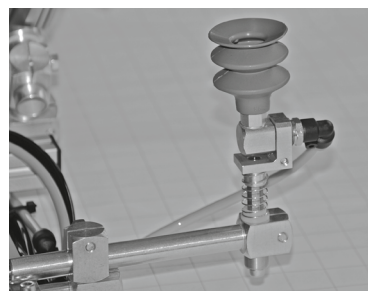

NEW

Product Description

Bellows vacuum cups for uneven surfaces especially suited for removing hot plastic parts to be painted from an injection moulding machine. Thermalon® is a material mixture specially optimised for the plastics industry with a hardness of 60 Shore A. Connection via plug-in nipple.

Advantage

- > Extremely low marking
- > Free of silicone and other paint-wetting-impairment substances (PWIS)
- > Long vacuum cup stroke and good adaptation to curved or uneven product surfaces

Technical Data


Item no.	Model / Lip dimensions		Material / color	Number of bellows	Usage temperature [°C]
21.005.146._*	SKT-B2-5	3	Thermalon® (bl)	2,5	0 - 160
21.007.147._*	SKT-B2-7	3	Thermalon® (bl)	2,5	0 - 160
21.009.148._*	SKT-B2-9	3	Thermalon® (bl)	2,5	0 - 160
21.012.149._*	SKT-B2-12	7	Thermalon® (bl)	2,5	0 - 160
21.014.150._*	SKT-B2-14	10	Thermalon® (bl)	2,5	0 - 160
21.018.151._*	SKT-B2-18	10	Thermalon® (bl)	2,5	0 - 160
21.020.152._*	SKT-B2-20	10	Thermalon® (bl)	2,5	0 - 160
21.025.153._*	SKT-B2-25	20	Thermalon® (bl)	2,5	0 - 160
21.032.154._*	SKT-B2-32	14,5	Thermalon® (bl)	2,5	0 - 160
21.042.155._*	SKT-B2-42	22	Thermalon® (bl)	2,5	0 - 160
21.052.156._*	SKT-B2-52	27	Thermalon® (bl)	2,5	0 - 160
21.062.157._*	SKT-B2-62	31	Thermalon® (bl)	2,5	0 - 160

Accessories


Item no.	Suitable fittings						
	M5-male	M5-female	M6-male	G1/8-male	G1/8-female	G1/4-male	G1/4-female
21.005.146._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.007.147._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.009.148._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.012.149._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.014.150._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.018.151._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.020.152._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.025.153._*	270.134 (p. 447)	270.347 (p. 450)	270.104 (p. 451)	270.033 (p. 454)	270.478 (p. 459)	--	--
21.032.154._*	--	--	270.315 (p. 452)	270.132 (p. 455)	270.114 (p. 460)	270.190 (p. 466)	270.192 (p. 471)
21.042.155._*	--	--	270.315 (p. 452)	270.132 (p. 455)	270.114 (p. 460)	270.190 (p. 466)	270.192 (p. 471)
21.052.156._*	--	--	270.315 (p. 452)	270.132 (p. 455)	270.114 (p. 460)	270.190 (p. 466)	270.192 (p. 471)
21.062.157._*	--	--	270.315 (p. 452)	270.132 (p. 455)	270.114 (p. 460)	270.190 (p. 466)	270.192 (p. 471)

* When ordering please add the appropriate material code to the item no. You will find it in the foldout.

Dimensions



Ø 5,5 | 6 | 9,5 mm

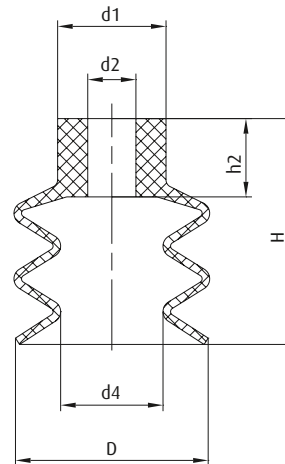

Ø 12 | 14 | 17,5 | 20 | 25 | 32 | 42 | 52 | 62 mm

Item no.	Ø D [mm]	Ø d1 [mm]	Ø d2 [mm]	Ø d4 [mm]	H [mm]	h2 [mm]
21.005.146._*	5,5	7	4	2,2	13,5	8
21.007.147._*	6	8,5	4,5	1,8	14	6,5
21.009.148._*	9,5	9	4,4	4	15	7,5
21.012.149._*	12	10	3,8	5	21	9
21.014.150._*	14	10	3,8	5	23	9
21.018.151._*	17,5	10	3,8	7,5	23	9
21.020.152._*	20	10	3,8	10	23	9
21.025.153._*	25	10	3,8	10	34	9
21.032.154._*	32	18	8	17	38	13
21.042.155._*	42	18	8	18,5	46	13
21.052.156._*	52	18	8	25	49	13
21.062.157._*	62	21	8	30	55	13

* When ordering please add the appropriate material code to the item no. You will find it in the foldout.